

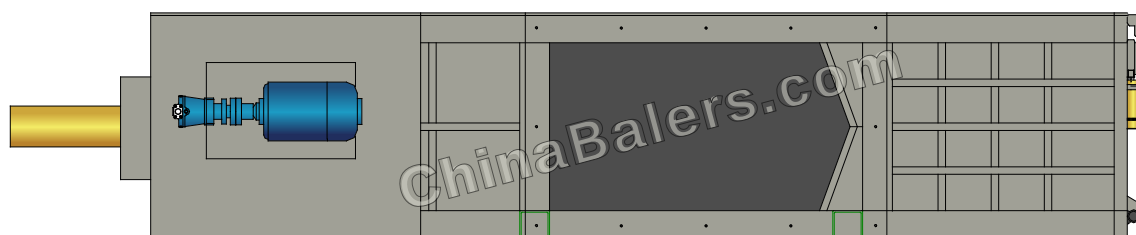
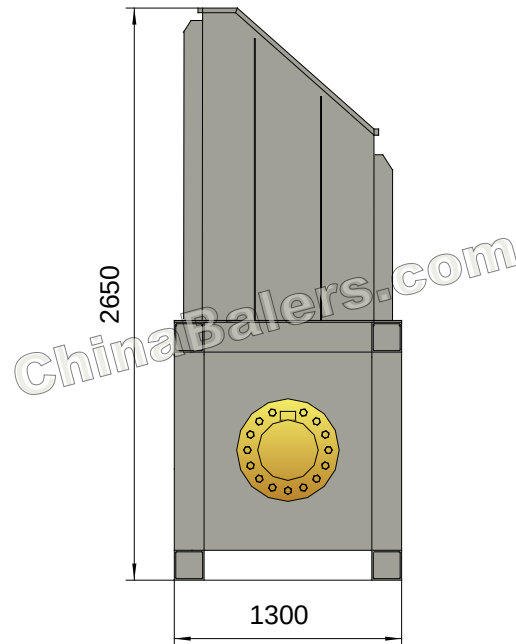


ChinaBalers


HPM Semi-auto Horizontal Baler

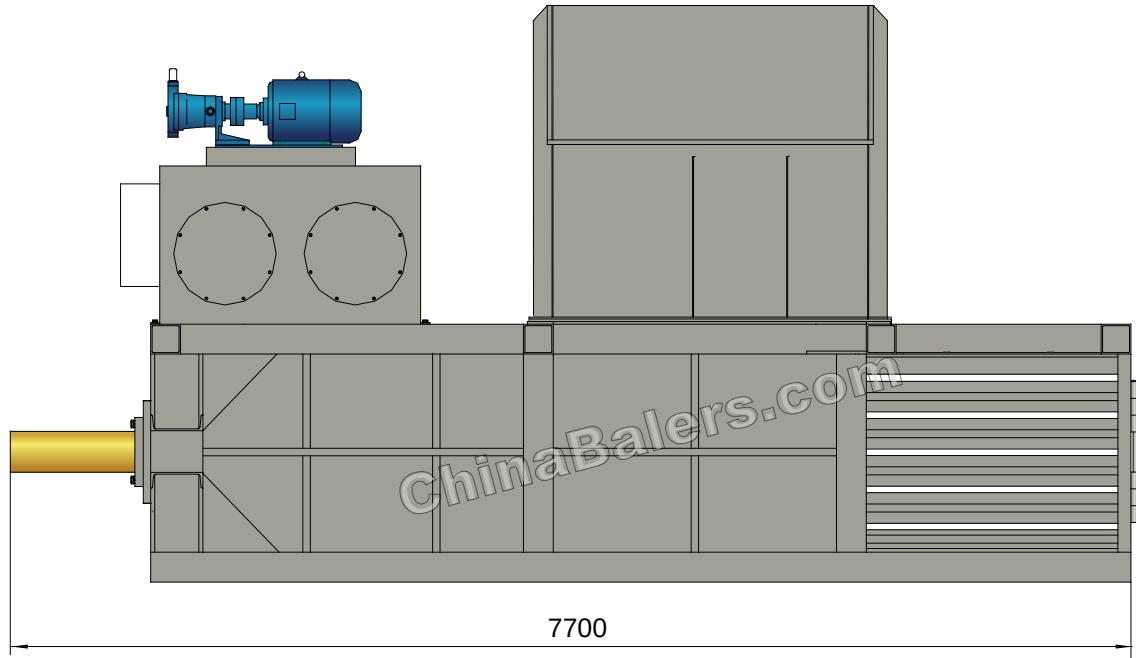

HPM63A



HPM63A



Horizontal Baler (Manual Belting)

Model: HPM63A

Power System (Main Motor)

Type:	Y200L2-6
Rated Power:	22 kW
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	63 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1200mm, Powered by 5.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	7700×1300×2650 mm
Feeding Opening (L×W):	1400×800 mm
Bale Size (W×H):	800×800 mm
Bale Weight (Cardboard):	280-400 kg
Production Rate (Cardboard):	1.7-2.4 tons/hr
Strapping:	Tempered Iron Wire, ϕ 2.8/3.2mm, 4 Lines, Manual Strapping.
Shipping Weight:	Approx. 9 + 6 tons
Loading (Standard Containers):	2×40'GP





Hydraulic Oil Brand

Oil Tank Volume: 1200 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM63B

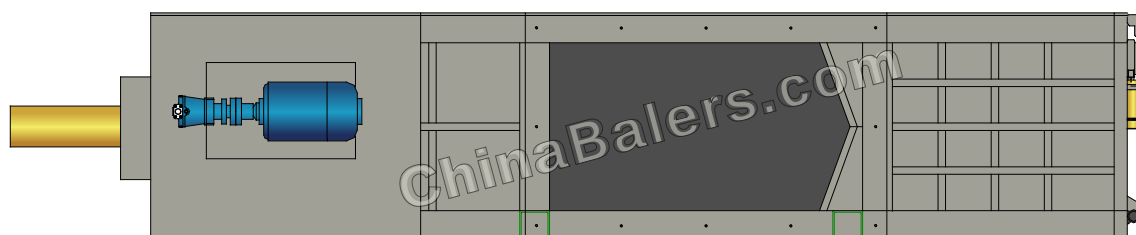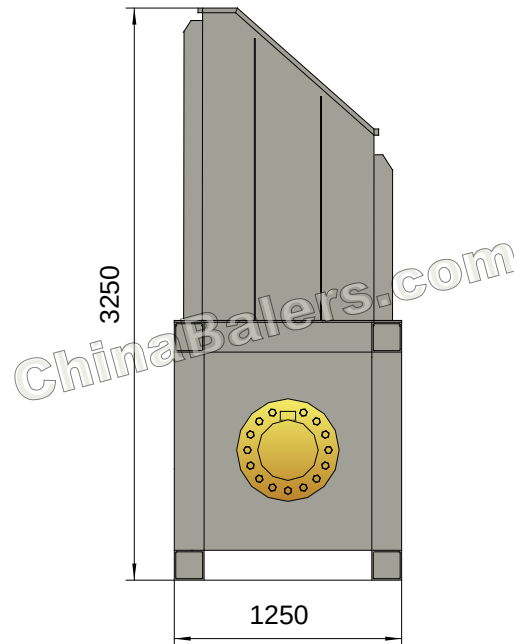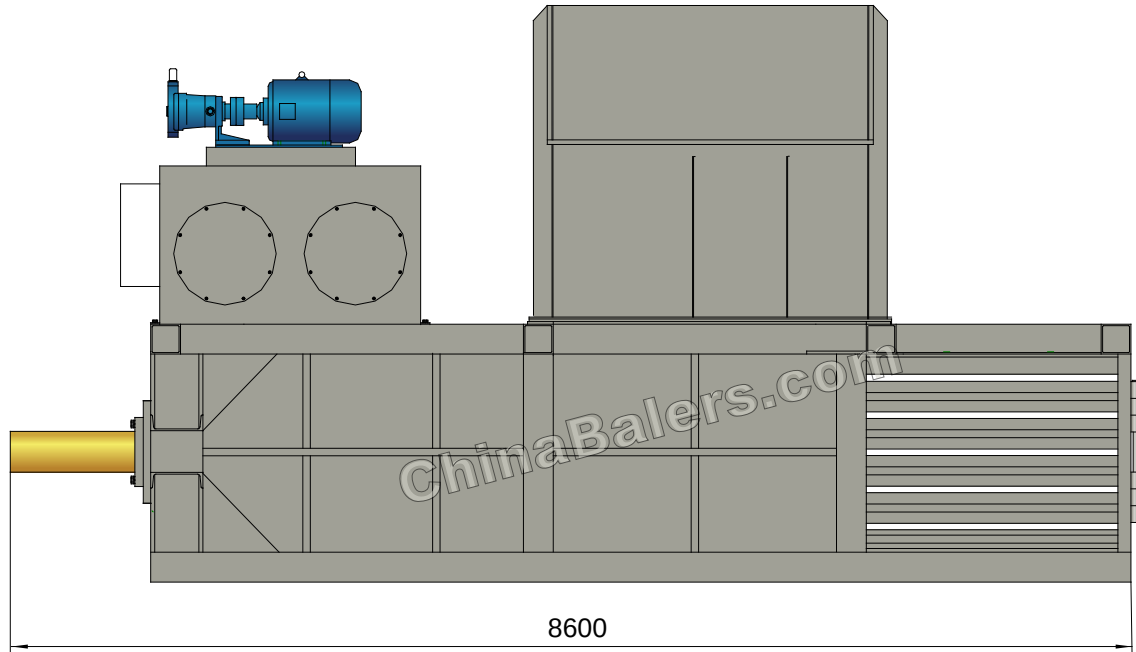

HPM63B



Horizontal Baler (Manual Belting)

Model: HPM63B

Power System (Main Motor)

Type:	Y200L2-6
Rated Power:	22 kW
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	63 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1200mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	8600×1250×3250 mm
Feeding Opening (L×W):	1600×720 mm
Bale Size (W×H):	720×1100 mm
Bale Weight (Cardboard):	330-470 kg
Production Rate (Cardboard):	2.0-2.8 tons/hr
Strapping:	Tempered Iron Wire, ϕ 2.8/3.2mm, 5 Lines, Manual Strapping.
Shipping Weight:	Approx. 10.2 + 6 tons
Loading (Standard Containers):	2×40'GP




Hydraulic Oil Brand

Oil Tank Volume: 1500 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM63C

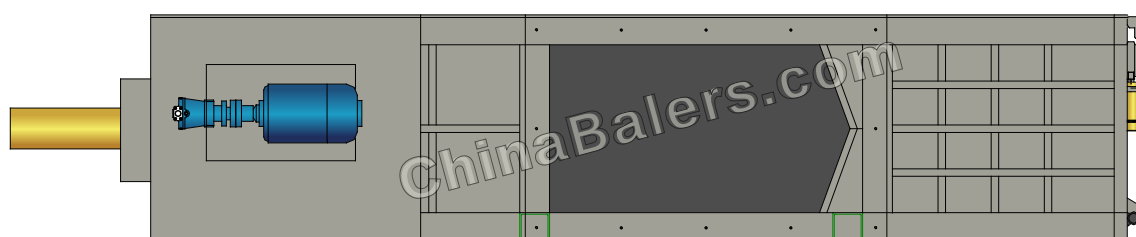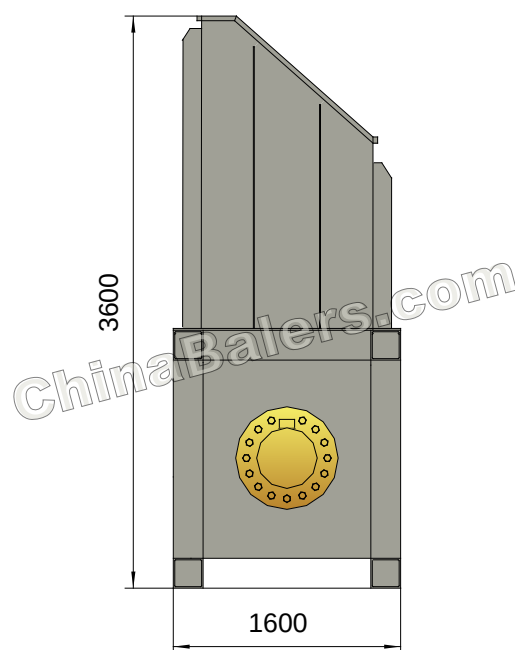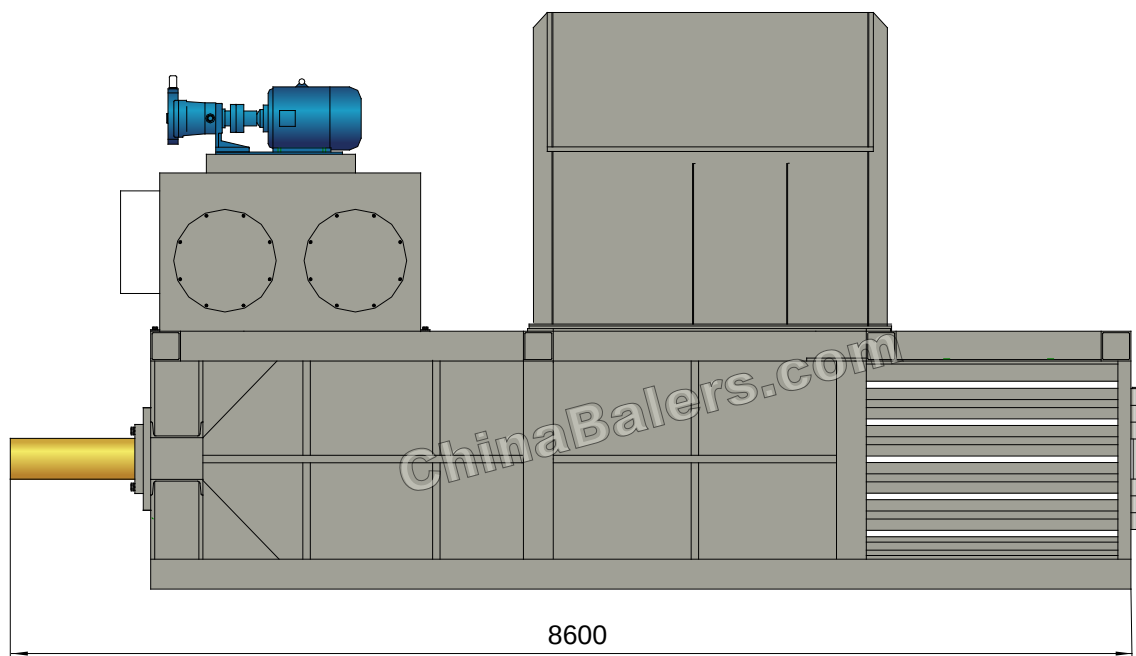

HPM63C



Horizontal Baler (Manual Belting)

Model: HPM63C

Power System (Main Motor)

Type:	Y200L2-6
Rated Power:	22 kW
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	63 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1200mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	8600×1600×3600 mm
Feeding Opening (L×W):	1800×1100 mm
Bale Size (W×H):	1100×900 mm
Bale Weight (Cardboard):	470-630 kg
Production Rate (Cardboard):	2.8-3.8 tons/hr
Strapping:	Tempered Iron Wire, ϕ 2.8/3.2mm, 5 Lines, Manual Strapping.
Shipping Weight:	Approx. 10.2 + 6 tons
Loading (Standard Containers):	2×40'GP





Hydraulic Oil Brand

Oil Tank Volume: 1500 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM63D

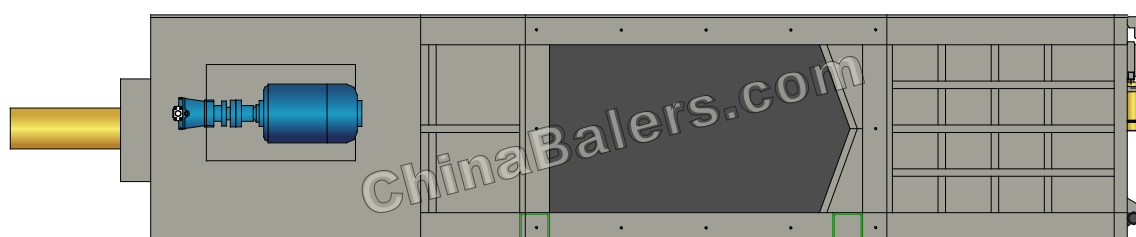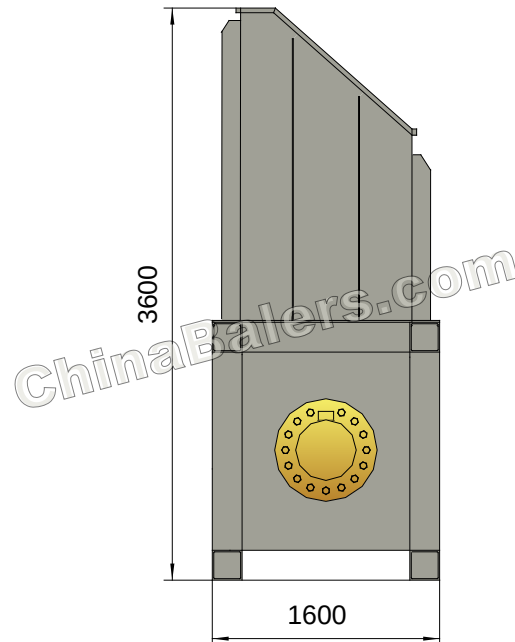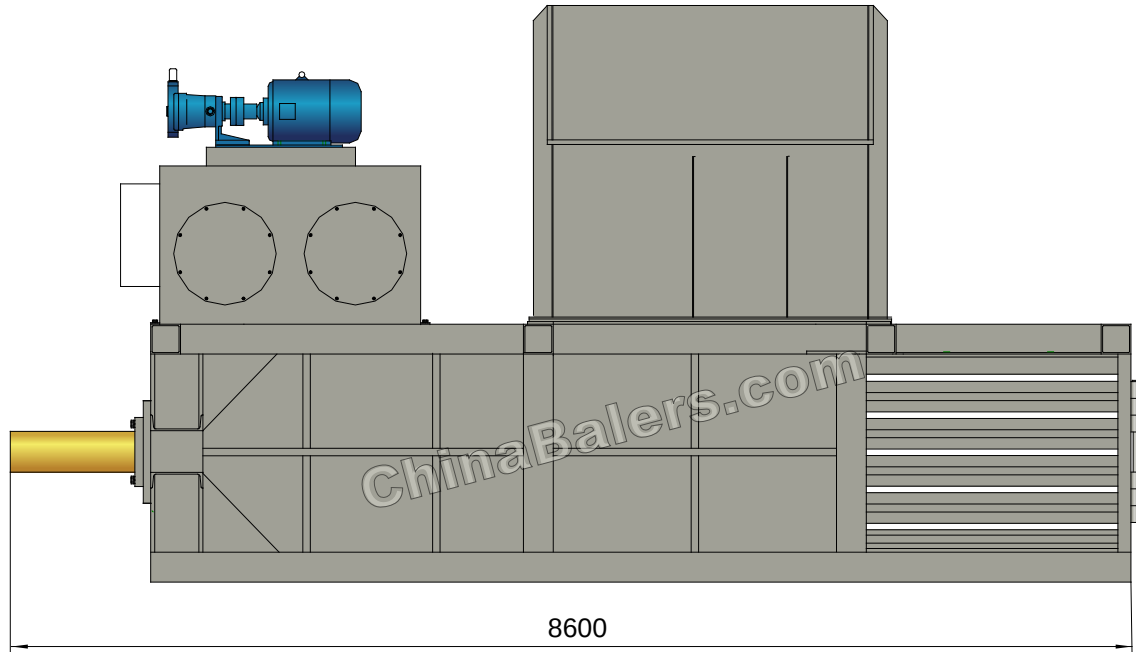

HPM63D



Horizontal Baler (Manual Belting)

Model: HPM63D

Power System (Main Motor)

Type:	Y200L2-6
Rated Power:	22 kW
Rated Speed:	970 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	63 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1200mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	8600×1600×3600 mm
Feeding Opening (L×W):	1800×1100 mm
Bale Size (W×H):	1100×1000 mm
Bale Weight (Cardboard):	500-670 kg
Production Rate (Cardboard):	3.0-4.0 tons/hr
Strapping:	Tempered Iron Wire, $\phi 2.8/3.2$ mm, 5 Lines, Manual Strapping.
Shipping Weight:	Approx. 10.5 + 6 tons
Loading (Standard Containers):	2×40'GP




Hydraulic Oil Brand

Oil Tank Volume: 1500 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM100A

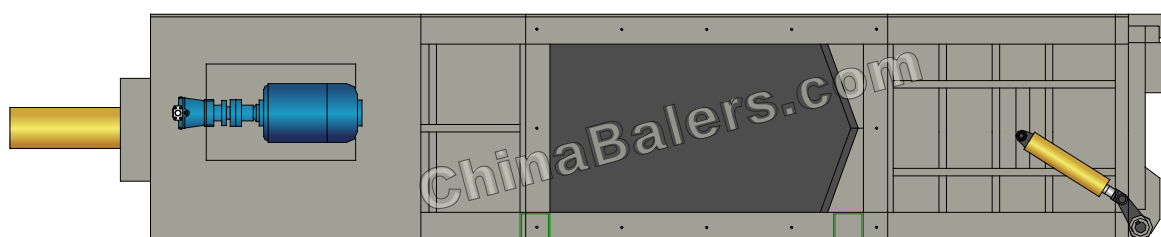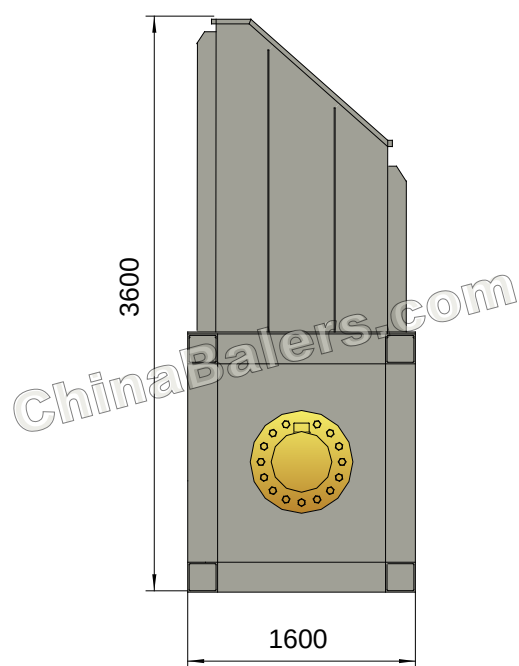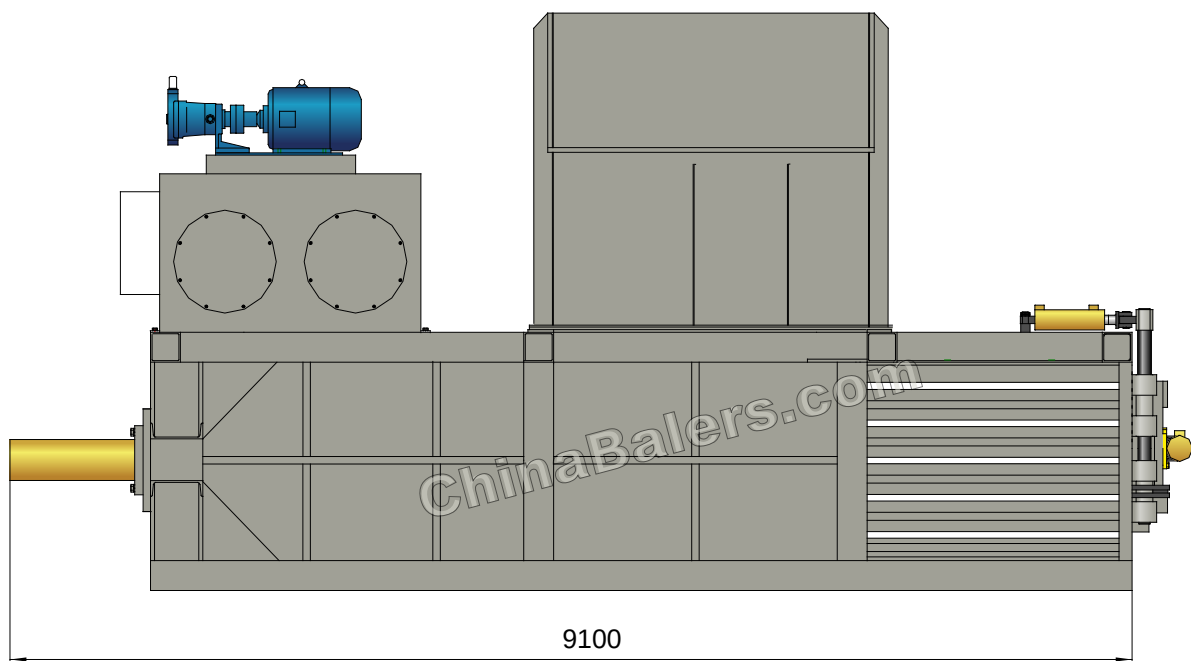

HPM100A



Horizontal Baler (Manual Belting)

Model: HPM100A

Power System (Main Motor)

Type:	Y225M-6
Rated Power:	30 kW
Rated Speed:	980 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	100 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1400mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	9100×1600×3600 mm
Feeding Opening (L×W):	2000×900 mm
Bale Size (W×H):	900×900 mm
Bale Weight (Cardboard):	450-600 kg
Production Rate (Cardboard):	2.7-3.6 tons/hr
Strapping:	Tempered Iron Wire, $\phi 2.8/3.2$ mm, 4 Lines, Manual Strapping.
Shipping Weight:	Approx. 12.5 + 6.5 tons
Loading (Standard Containers):	2×40'GP




Hydraulic Oil Brand

Oil Tank Volume: 1500 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM100B

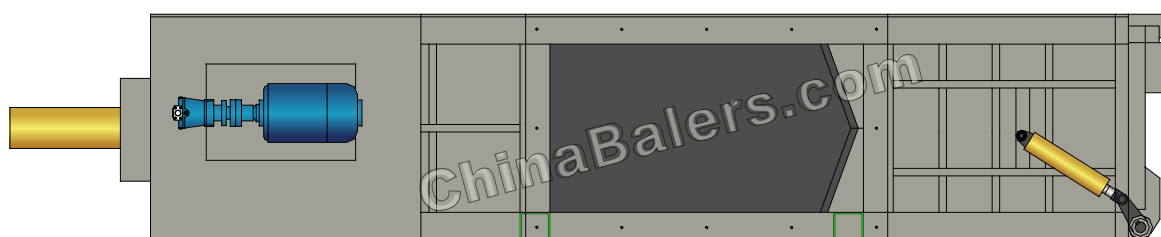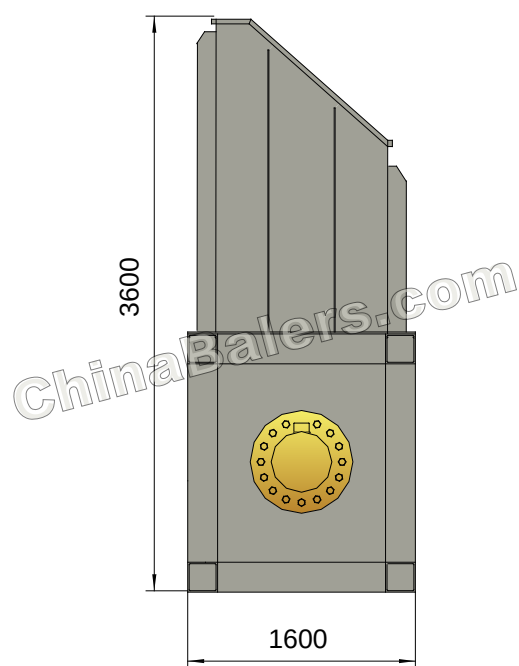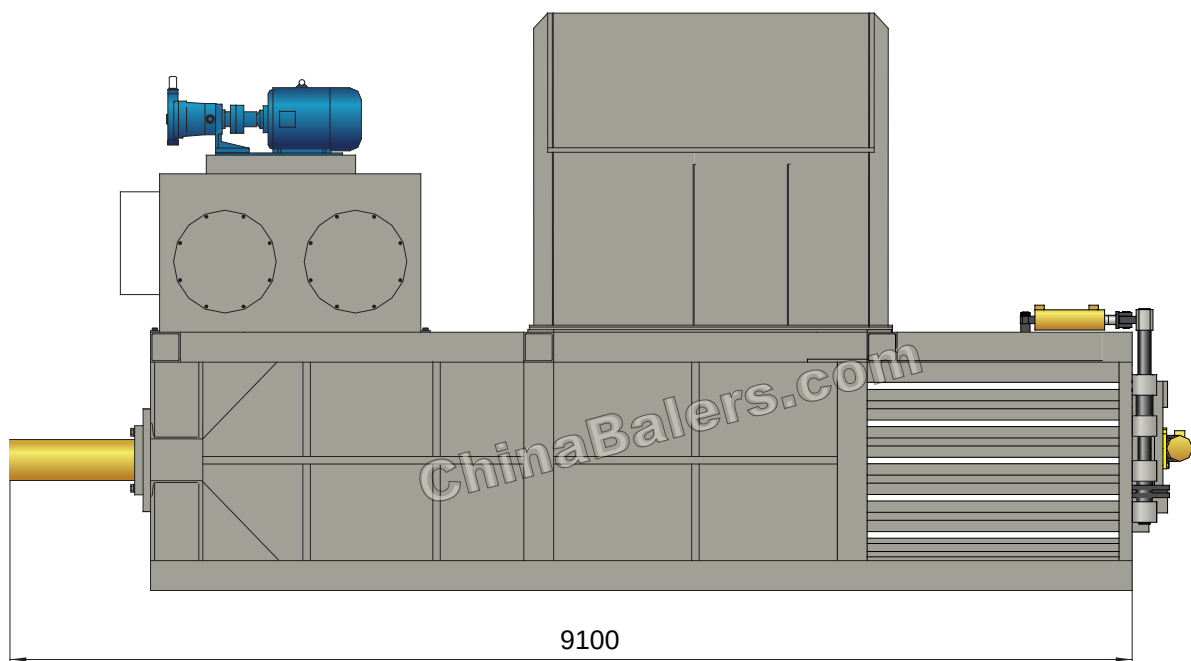

HPM100B



Horizontal Baler (Manual Belting)

Model: HPM100B

Power System (Main Motor)

Type:	Y225M-6
Rated Power:	30 kW
Rated Speed:	980 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	100 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1:	160YCY14-1B
Rated Displacement:	160 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1400mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	9100×1600×3600 mm
Feeding Opening (L×W):	2000×1100 mm
Bale Size (W×H):	1100×1100 mm
Bale Weight (Cardboard):	650-900 kg
Production Rate (Cardboard):	3.9-5.4 tons/hr
Strapping:	Tempered Iron Wire, $\phi 2.8/3.2$ mm, 5 Lines, Manual Strapping.
Shipping Weight:	Approx. 13.8 + 6.5 tons
Loading (Standard Containers):	2×40'GP





Hydraulic Oil Brand

Oil Tank Volume: 1500 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM125A

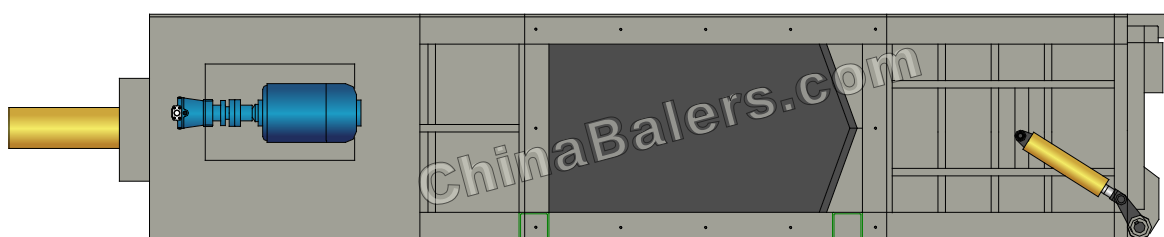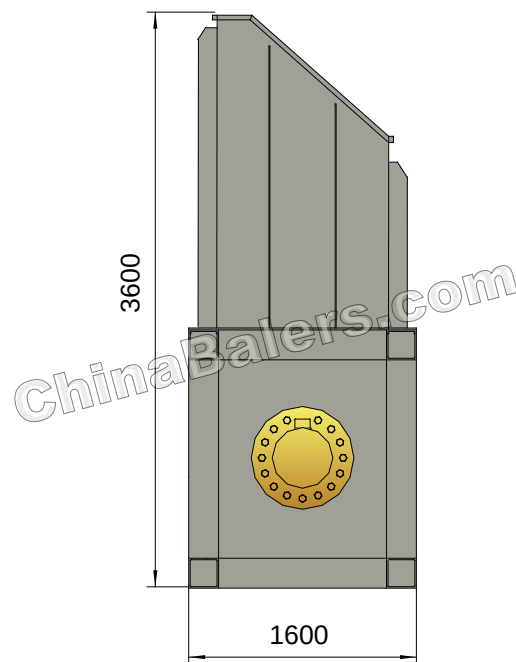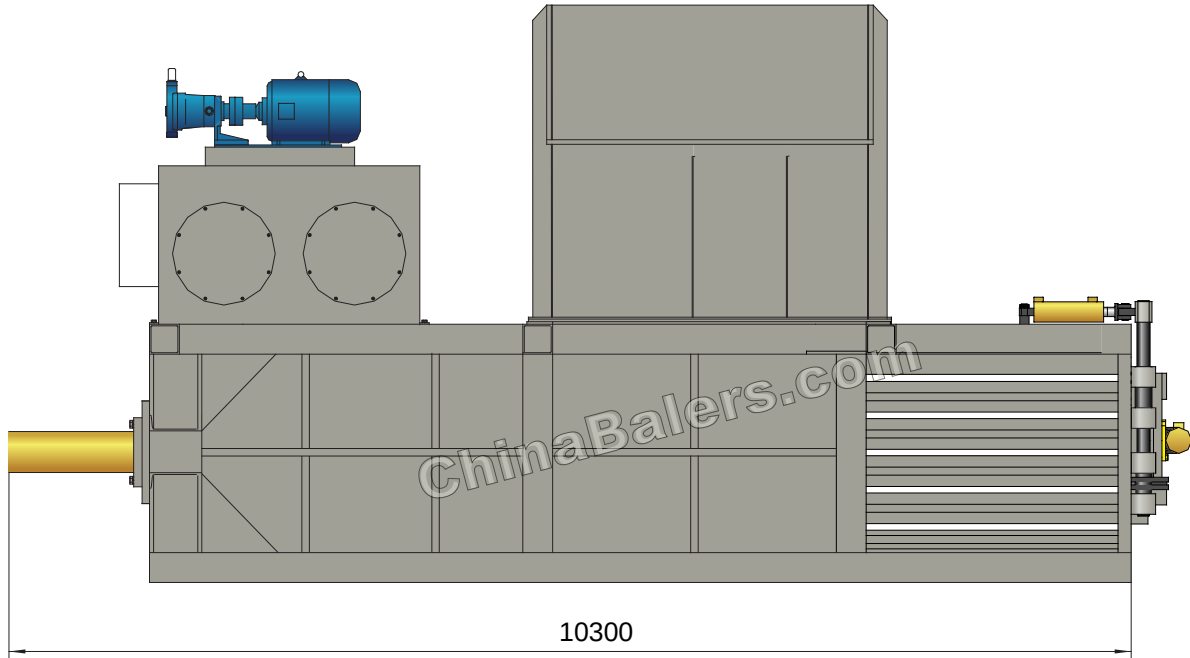

HPM125A



Horizontal Baler (Manual Belting)

Model: HPM125A

Power System (Main Motor)

Type:	Y225S-4 / Y250M-6
Rated Power:	37 / 37 kW
Rated Speed:	1480 / 980 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	125 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1:	160YCY / 250YCY
Rated Displacement:	160 / 250 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1600mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	10300×1600×3600 mm
Feeding Opening (L×W):	2200×1100 mm
Bale Size (W×H):	1100×900 mm
Bale Weight (Cardboard):	630-900 kg
Production Rate (Cardboard):	3.8-5.4 tons/hr
Strapping:	Tempered Iron Wire, ϕ 2.8/3.2mm, 4 Lines, Manual Strapping.
Shipping Weight:	Approx. 14.3+7 tons
Loading (Standard Containers):	2×40'GP




Hydraulic Oil Brand

Oil Tank Volume: 2000 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM125B

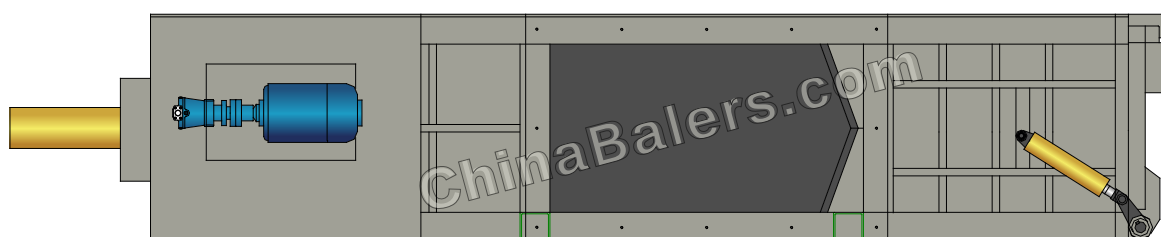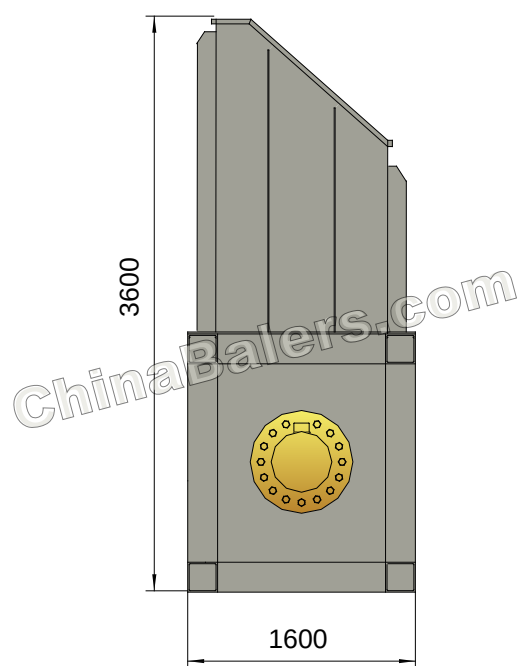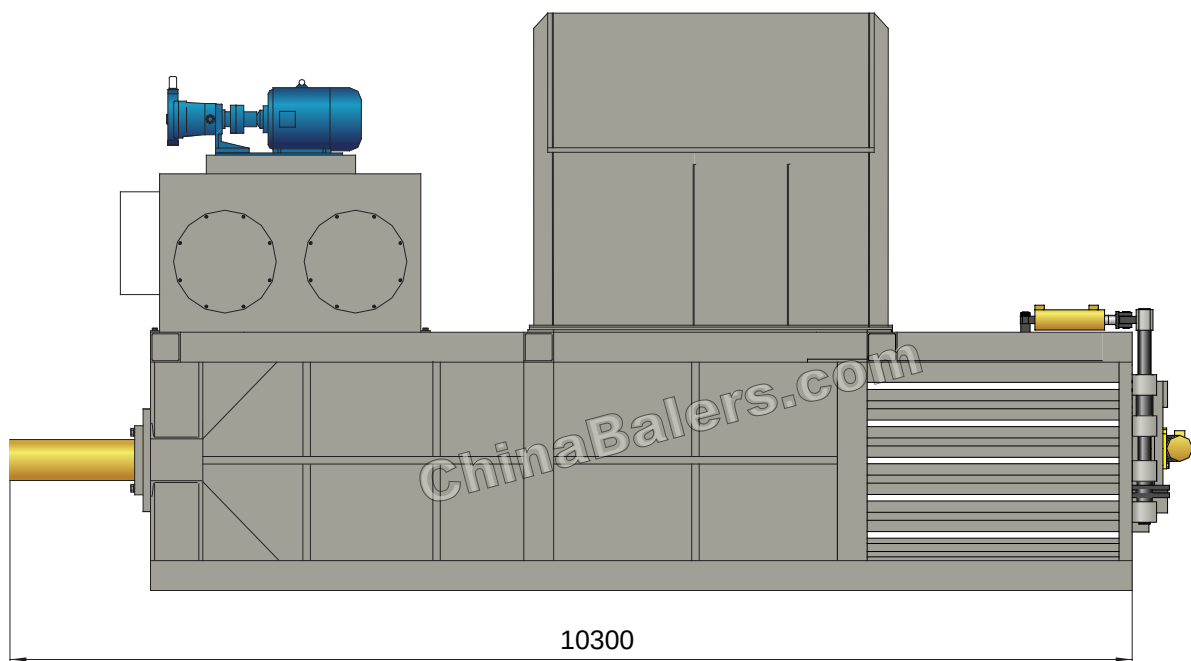

HPM125B



Horizontal Baler (Manual Belting)

Model: HPM125B

Power System (Main Motor)

Type: Y225S-4 / Y250M-6
 Rated Power: 37 / 37 kW
 Rated Speed: 1480 / 980 rpm
 Power Spec: 3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force: 125 Ton
 Locking Cyl. Force: 23.5 Ton
 Open-door Cyl. Force: 12.5 Ton
 Hydraulic System Pressure: 25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1: 160YCY / 250YCY
 Rated Displacement: 160 / 250 ml/r
 Max Operating Pressure: 31.5 MPa

Pump #2: 25SCY14-1B
 Rated Displacement: 25 ml/r
 Max Operating Pressure: 31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
 V-shaped Cutting Blades;
 Hydraulic Oil Cooler;
 Magnetic Return Oil Filter;
 Conveyor Width 1600mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
 Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H): 10300×1600×3600 mm
 Feeding Opening (L×W): 2200×1100 mm
 Bale Size (W×H): 1100×1000 mm
 Bale Weight (Cardboard): 680-980 kg
 Production Rate (Cardboard): 4.1-5.9 tons/hr
 Strapping: Tempered Iron Wire, $\phi 2.8/3.2$ mm, 5 Lines, Manual Strapping.
 Shipping Weight: Approx. 14.6 + 7 tons
 Loading (Standard Containers): 2×40'GP





Hydraulic Oil Brand

Oil Tank Volume: 2000 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM125C

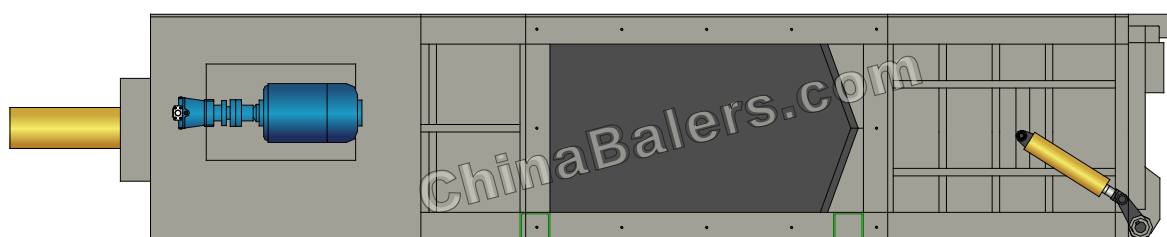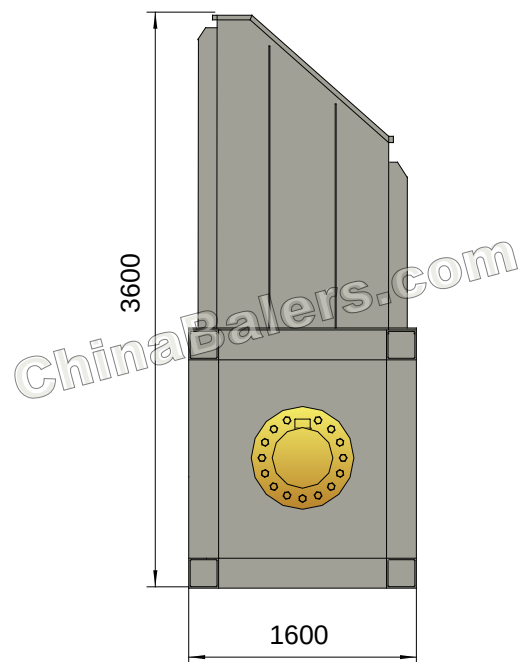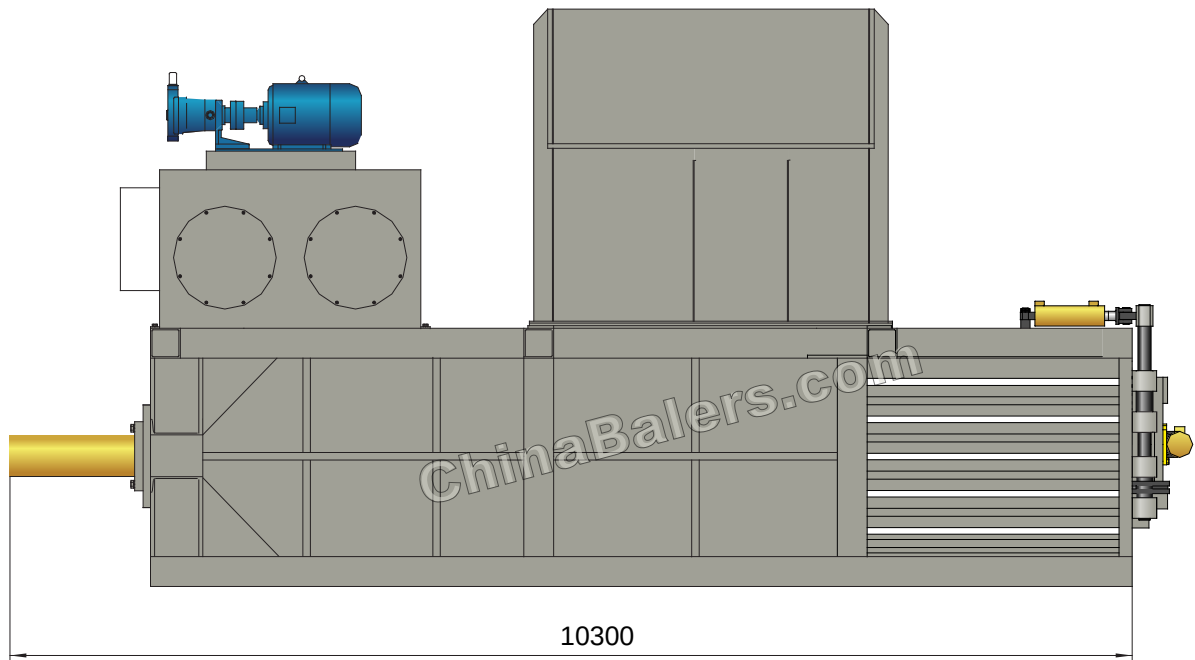

HPM125C



Horizontal Baler (Manual Belting)

Model: HPM125C

Power System (Main Motor)

Type:	Y225S-4 / Y250M-6
Rated Power:	37 / 37 kW
Rated Speed:	1480 / 980 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	125 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1:	160YCY / 250YCY
Rated Displacement:	160 / 250 ml/r
Max Operating Pressure:	31.5 MPa

Pump #2:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1600mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	10300×1600×3600 mm
Feeding Opening (L×W):	2200×1100 mm
Bale Size (W×H):	1100×1100 mm
Bale Weight (Cardboard):	730-1050 kg
Production Rate (Cardboard):	4.4-6.3 tons/hr
Strapping:	Tempered Iron Wire, ϕ 2.8/3.2mm, 5 Lines, Manual Strapping.
Shipping Weight:	Approx. 15 + 7 tons
Loading (Standard Containers):	2×40'GP





Hydraulic Oil Brand

Oil Tank Volume: 2000 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM125D

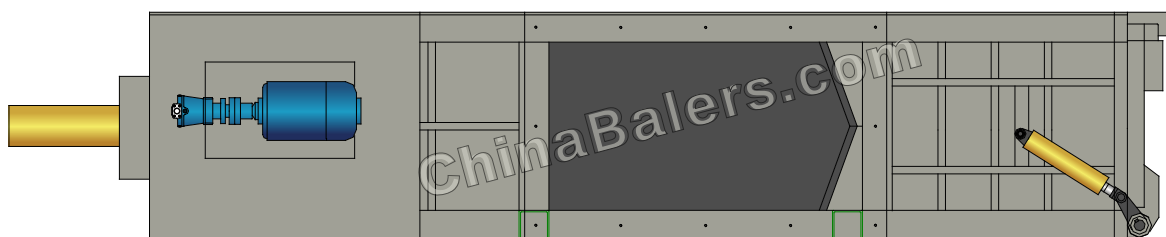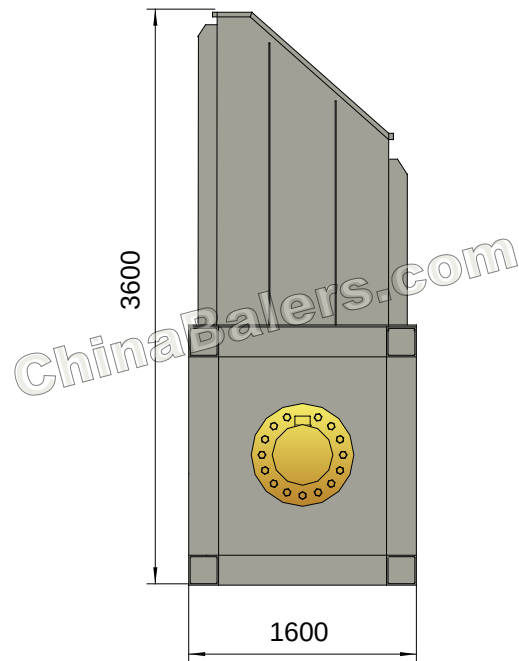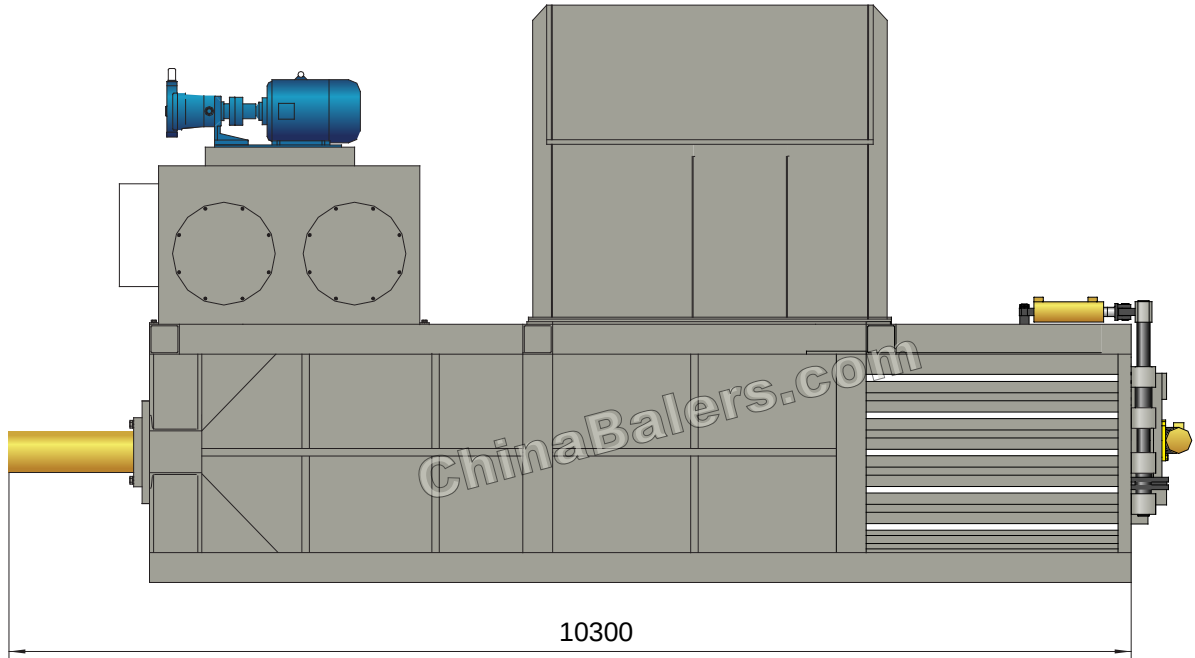

HPM125D



Horizontal Baler (Manual Belting)

Model: HPM125D

Power System (Main Motor)

Type: Y225S-4 / Y250M-6
 Rated Power: 37 / 37 kW
 Rated Speed: 1480 / 980 rpm
 Power Spec: 3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force: 125 Ton
 Locking Cyl. Force: 23.5 Ton
 Open-door Cyl. Force: 12.5 Ton
 Hydraulic System Pressure: 25 MPa

Hydraulic System (Pump, 2 sets)

Pump #1: 160YCY / 250YCY
 Rated Displacement: 160 / 250 ml/r
 Max Operating Pressure: 31.5 MPa

Pump #2: 25SCY14-1B
 Rated Displacement: 25 ml/r
 Max Operating Pressure: 31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
 V-shaped Cutting Blades;
 Hydraulic Oil Cooler;
 Magnetic Return Oil Filter;
 Conveyor Width 1600mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
 Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H): 10300×1600×3600 mm
 Feeding Opening (L×W): 2200×1100 mm
 Bale Size (W×H): 1100×1250 mm
 Bale Weight (Cardboard): 820-1150 kg
 Production Rate (Cardboard): 4.9-6.9 tons/hr
 Strapping: Tempered Iron Wire, ϕ 2.8/3.2mm, 5 Lines, Manual Strapping.
 Shipping Weight: Approx. 15.4 + 7 tons
 Loading (Standard Containers): 2×40'GP




Hydraulic Oil Brand

Oil Tank Volume: 2000 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfina 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfina 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM160A

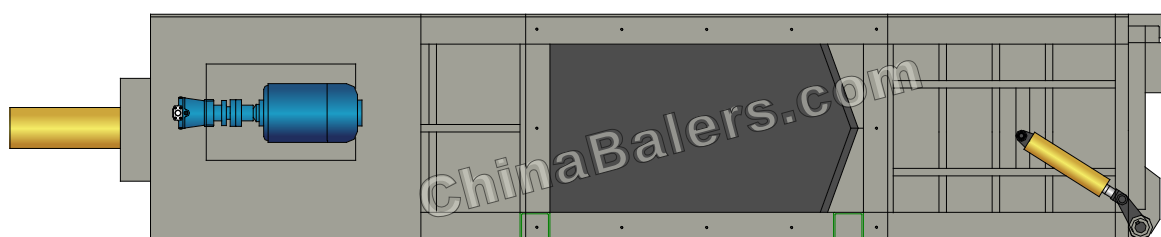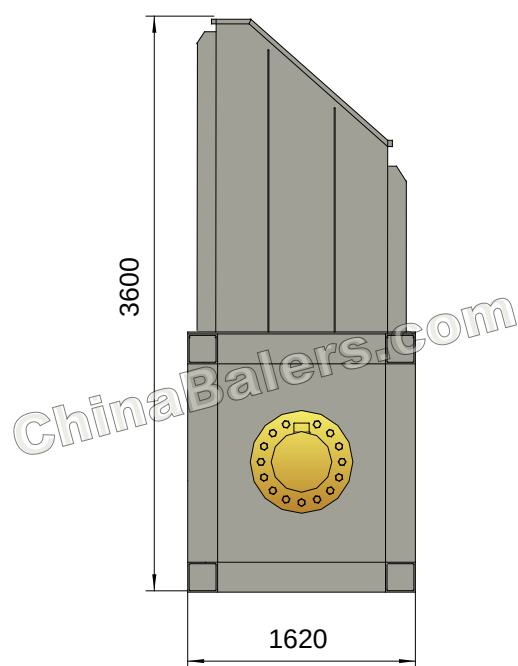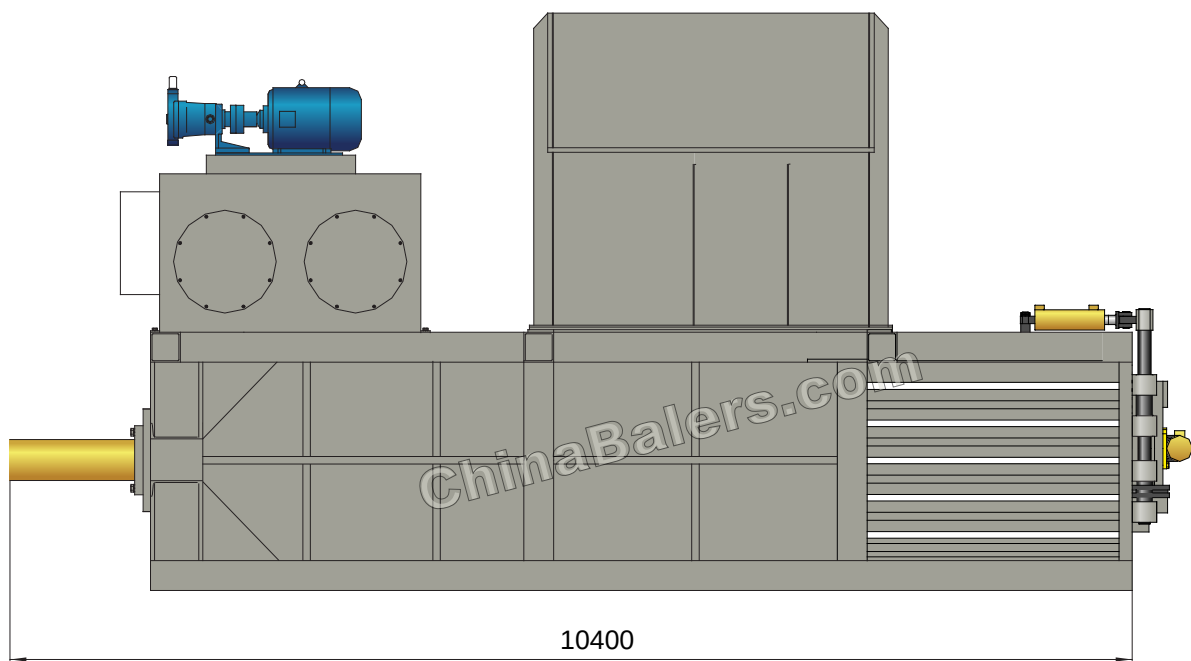

HPM160A



Horizontal Baler (Manual Belting)

Model: HPM160A

Power System (Main Motor, 2 sets)

Type:	Y200L2-6
Rated Power:	22 kW (/set)
Rated Speed:	980 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	160 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 3 sets)

Pump #1, #2:	160YCY14-1B
Rated Displacement:	160 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Pump #3:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1600mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	10400×1620×3600 mm
Feeding Opening (L×W):	2200×1120 mm
Bale Size (W×H):	1120×880 mm
Bale Weight (Cardboard):	700-1050 kg
Production Rate (Cardboard):	4.2-6.2 tons/hr
Strapping:	Tempered Iron Wire, ϕ 3.2/3.6mm, 5 Lines, Manual Strapping.
Shipping Weight:	Approx. 16 + 7 tons
Loading (Standard Containers):	2×40'GP





Hydraulic Oil Brand

Oil Tank Volume: 2100 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM160B

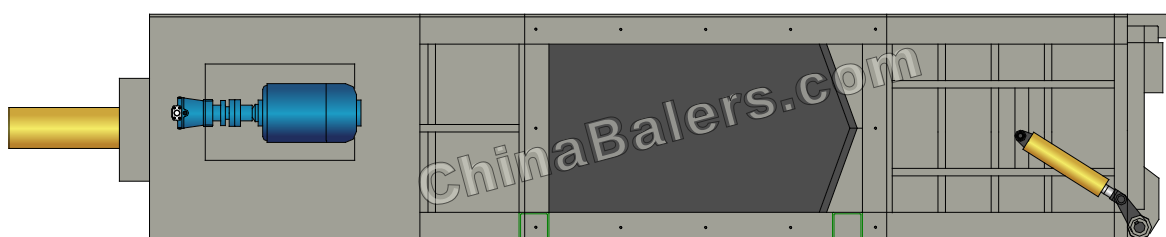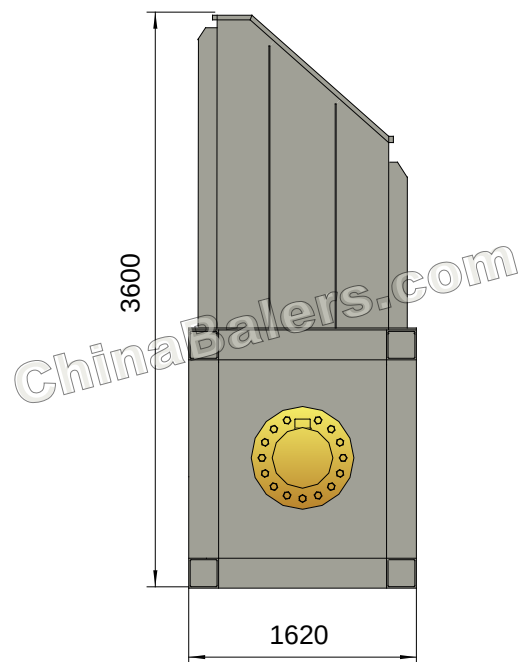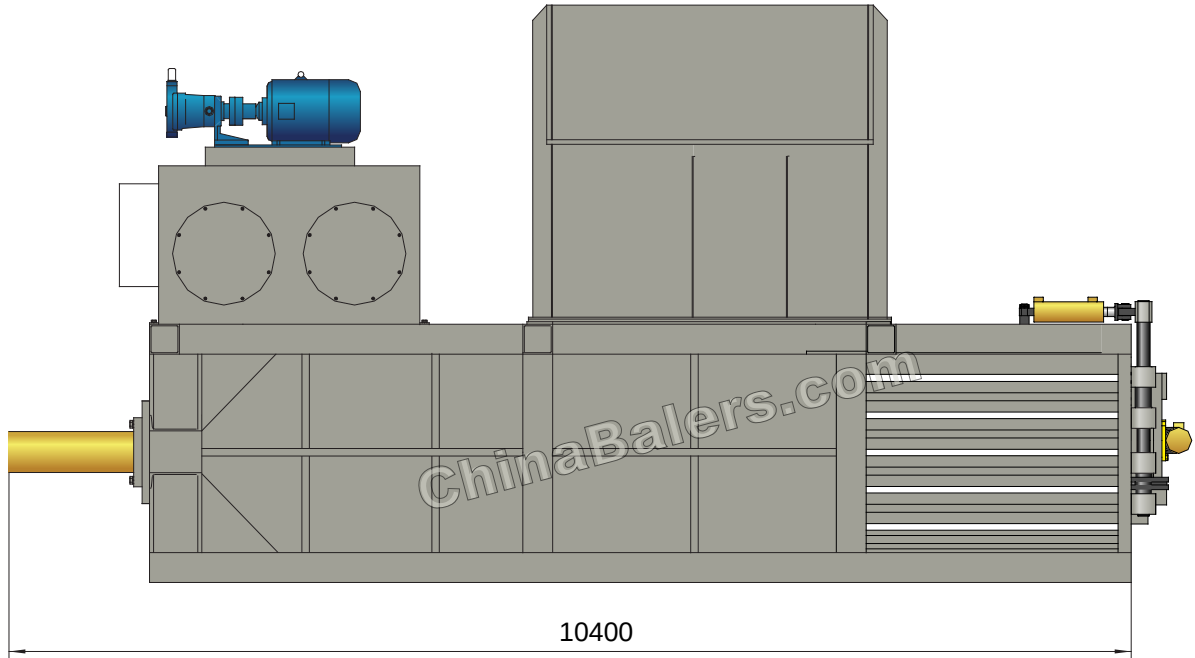

HPM160B



Horizontal Baler (Manual Belting)

Model: HPM160B

Power System (Main Motor, 2 sets)

Type:	Y200L2-6
Rated Power:	22 kW (/set)
Rated Speed:	980 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	160 Ton
Locking Cyl. Force:	23.5 Ton
Open-door Cyl. Force:	12.5 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump, 3 sets)

Pump #1, #2:	160YCY14-1B
Rated Displacement:	160 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Pump #3:	25SCY14-1B
Rated Displacement:	25 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1600mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	10400×1620×3600 mm
Feeding Opening (L×W):	2200×1120 mm
Bale Size (W×H):	1120×1300 mm
Bale Weight (Cardboard):	900-1350 kg
Production Rate (Cardboard):	5.4-8.0 tons/hr
Strapping:	Tempered Iron Wire, ϕ 3.2/3.6mm, 7 Lines, Manual Strapping.
Shipping Weight:	Approx. 17 + 7 tons
Loading (Standard Containers):	2×40'GP





Hydraulic Oil Brand

Oil Tank Volume: 2100 ltr


ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.

HPM250

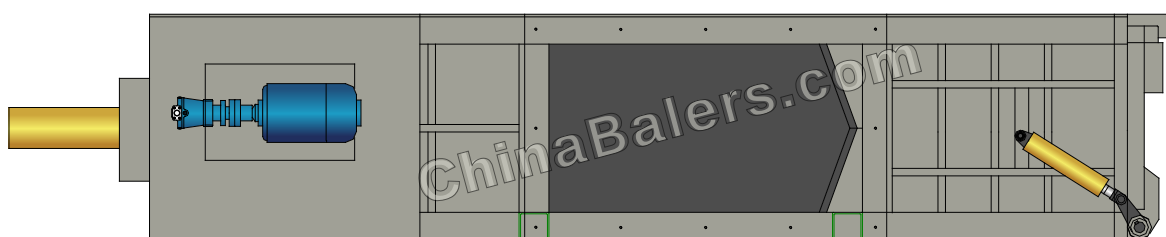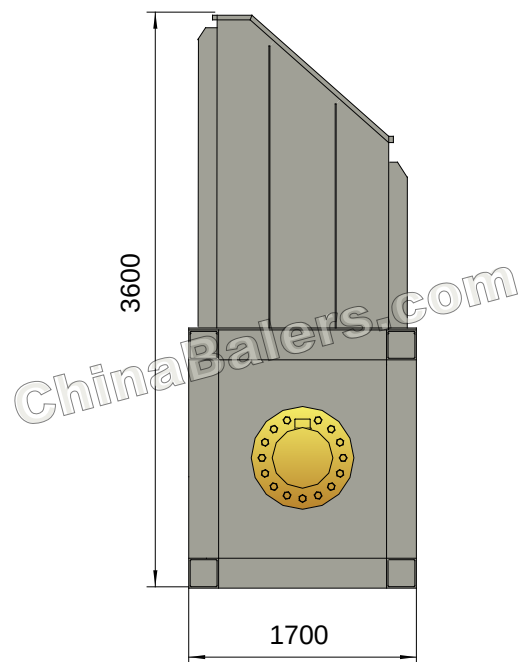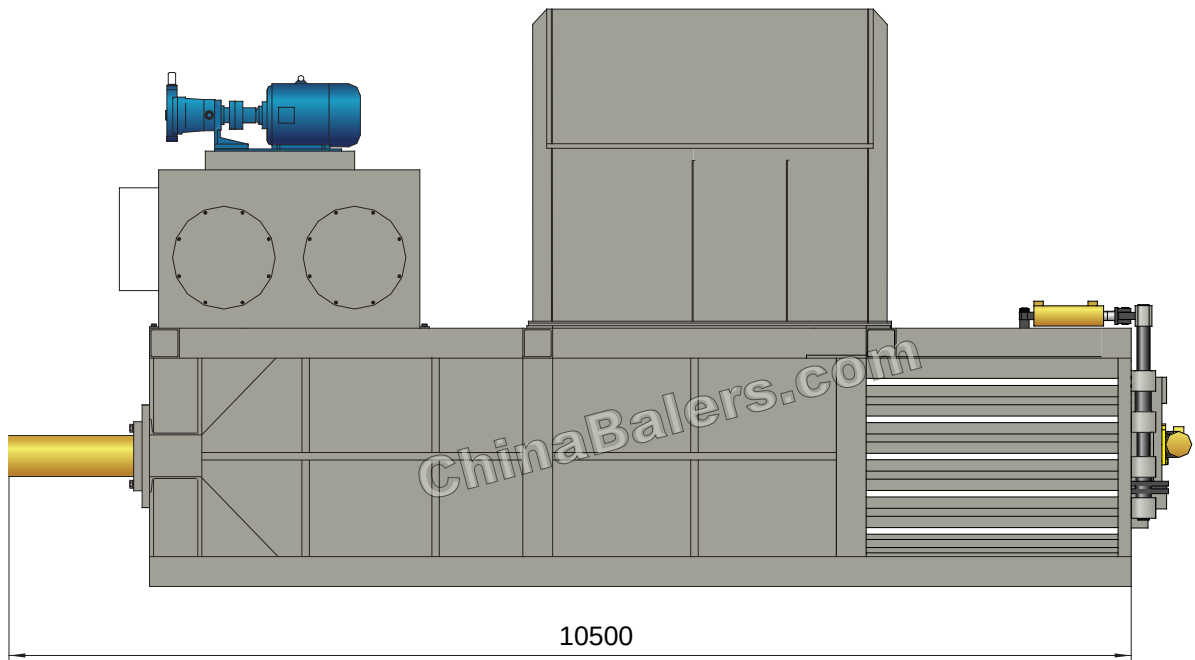

HPM250



Horizontal Baler (Manual Belting)

Model: HPM250

Power System (Main Motor, 2 sets)

Type: Y225M-4 / Y280S-6
Rated Power: 45 / 45 kW (/set)
Rated Speed: 1480 / 980 rpm
Power Spec: 3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force: 250 Ton
Locking Cyl. Force: 30 Ton
Open-door Cyl. Force: 23.5 Ton
Hydraulic System Pressure: 25 MPa

Hydraulic System (Pump, 3 sets)

Pump #1, #2: 160YCY / 250YCY
Rated Displacement: 160 / 250 ml/r (/set)
Max Operating Pressure: 31.5 MPa

Pump #3: 25SCY14-1B
Rated Displacement: 25 ml/r
Max Operating Pressure: 31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders;
V-shaped Cutting Blades;
Hydraulic Oil Cooler;
Magnetic Return Oil Filter;
Conveyor Width 1600mm, Powered by 7.5kW Motor.

Operation System

Mitsubishi PLC, Kinco Touch Screen for Operation.

Optional Configuration

Diesel / Diesel Generator for Power;
Hydraulic Oil Heater.

General Description

Main Machine Size (L×W×H):	10500×1700×3600 mm
Feeding Opening (L×W):	2200×1120 mm
Bale Size (W×H):	1120×1300 mm
Bale Weight (Cardboard):	1050-1500 kg
Production Rate (Cardboard):	6.3-9.5 tons/hr
Strapping:	Tempered Iron Wire, ϕ 3.6/4.0mm, 7 Lines, Manual Strapping.
Shipping Weight:	Approx. 21 + 7 tons
Loading (Standard Containers):	2×40'GP

Hydraulic Oil Brand

Oil Tank Volume: 3200 ltr

ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.



Soochow Baling Machinery Ltd.
Jiangsu Huahong Technology Stock Co., Ltd.

Factory: Zhouzhuang, Jiangyin, Jiangsu

Office: Rm 1202, SIPCTD Bldg, No. 381 Suzhou Avenue East,
Suzhou Industrial Park, Suzhou, Jiangsu 215028 China

Tel: +86 512 6255 1141 **Fax:** +86 512 6255 1142

Email: info@chinabalers.com; chinabalers@foxmail.com

Website: www.chinabalers.com; www.chinabalers.net